


SC-20T t=0.35mm

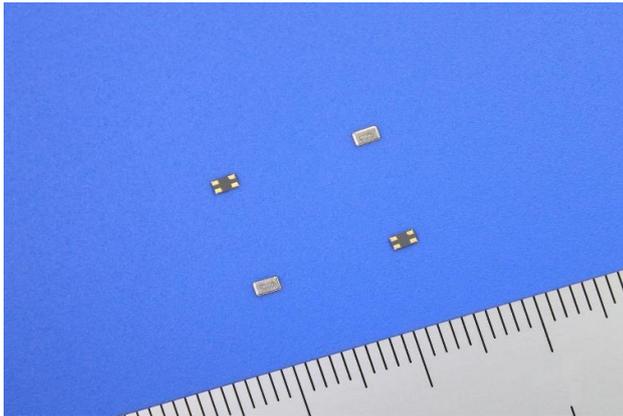

FEATURES

- Ultra thin type with height 0.35mm max.
- SMD type suitable for high density surface mounting.
- Excellent shock and heat resistance.
- Complete Pb-free.
- Complies with EU RoHS directive.
- A crystal resonator processed by high reliable photo-lithographic technology inside.

APPLICATIONS


Smart card, Wearable, Module, Sub-clock function for a variety of Microcomputer, etc.

STANDARD SPECIFICATIONS


Conditions where not specified (Temperature: 25±2°C, DL;0.1μW)

Item	Symbol	Specifications	Conditions Note
Nominal Frequency	f _{nom}	32.768kHz	
Frequency Tolerance	f _{tol}	±20×10 ⁻⁶	※Please contact us for other deviations.
Turnover Temperature	T _i	+25±5°C	
Parabolic Coefficient	β	(-0.033±10%)×10 ⁻⁶ /°C ²	
Load Capacitance	C _L	6.0pF, 7.0pF, 9.0pF, 12.5pF	※Please contact us for other CL values.
Motional Resistance (ESR)	R ₁	75kΩ max.	
Absolute Maximum Drive Level	DLmax.	1.0μW max.	
Level of Drive	DL	0.1μW typ.	
Shunt Capacitance	C ₀	0.8pF typ.	
Frequency Ageing	f _{age}	±3×10 ⁻⁶	+25±3°C, First Year
Operating Temperature	T _{use}	-40~+85°C	
Storage Temperature	T _{stg}	-55~+125°C	Piece part basis


DIMENSIONS

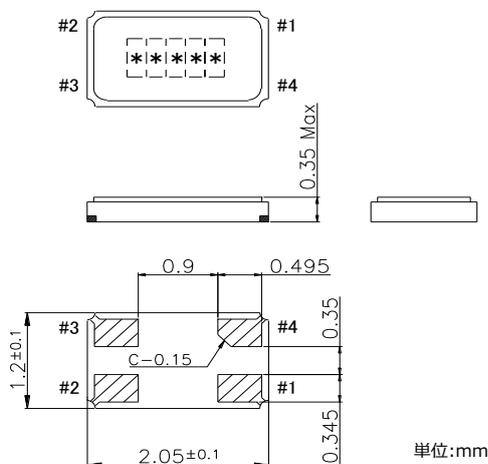

INTERNAL LEAD CONNECTIONS

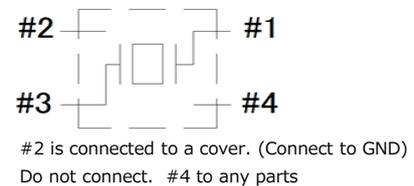

RECOMMENDED SOLDERING PATTERN

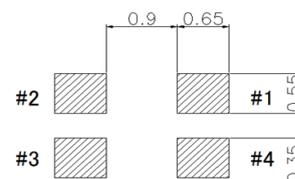

Remark: Please make sure that there is no pattern under SC-20T on the circuit board.

Seiko Instruments Inc.

Electronic Components Sales Head Office
 1-8, Nakase, Mihamaku, Chiba-shi, Chiba 261-8507, Japan
 Tel : +81-43-211-1207 Fax : +81-43-211-8030
[http : //www.sii.co.jp/en/quartz/](http://www.sii.co.jp/en/quartz/)